



C.H. Evensen Industriovner AS



Ceramic Lined Galvanizing Furnace with Immersion Heating Rods



Copyright ©2006 C.H. Evensen Industriovner AS

C.H. Evensen Industriovner AS
Tomteveien 19
N-1618 Fredrikstad
Norway

Tel: +47 69 94 91 00
Fax: +47 69 94 91 01
www.che.no
e-mail: post@che.no

- **The development of the Silicoat** immersion heating rod has enabled a new concept for electric resistance heating of metals. With the unique physical and electrical properties of the **Silicoat** rod, it can be installed directly in molten metals.

- **The total energy** from the **Silicoat** immersion rod is transferred directly to the metal by conduction. Hence, there is no energy loss from the energy source.

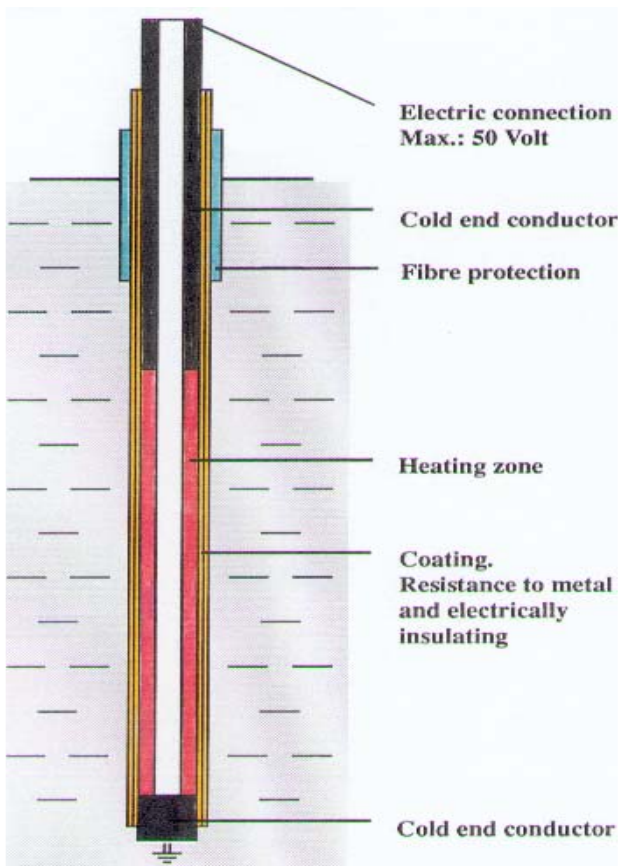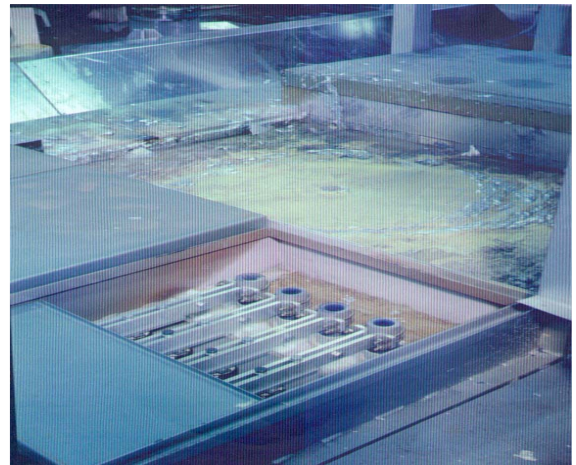

- **The Silicoat** immersion heating rods are applicable to the proven CHE design of ceramic lined galvanizing baths.

- **The voltage** applied to the rods is limited to 50V, being transformed from line voltage through a multistep transformer.

- **The zinc temperature** is controlled by PLC-unit with modem, connected to thyristors in the supply voltage line.

- **Silicoat** immersion heating rods and ceramic lined galvanizing baths contribute to high thermal efficiency of the heating system, high power installations for high production rates in small zinc volumes and long life galvanizing bath.

- **High temperature Galvanizing**

High temperature galvanizing at 560°C is used for galvanizing small components such as fasteners, threaded bolts, nails and brackets. High temperature galvanizing gives uniform and controllable coatings, also to silicon and aluminium kitted steels.